



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ :

H04L 25/06, H03D 3/00

A1

(11) International Publication Number:

WO 00/64115

(43) International Publication Date:

26 October 2000 (26.10.00)

(21) International Application Number: PCT/EP00/03211

(22) International Filing Date: 11 April 2000 (11.04.00)

(30) Priority Data:

9909179.5

21 April 1999 (21.04.99)

GB


(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON
[SE/SE]; S-126 25 Stockholm (SE).(72) Inventors: SANDBERG, Kenneth, Carl, Evert; Gustavägen
90, S-178 31 Ekerö (SE). ANDERSSON, Gunnar, Arne,
Rickard; Advokatbacken 22 III, S-145 56 Norsborg (SE).(74) Agent: O'CONNELL, David, Christopher; Haseltine Lake &
CO., Imperial House, 15-19 Kingsway, London WC2B 6UD
(GB).

(81) Designated States: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

*With international search report.**Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.*

(54) Title: RADIO RECEIVER

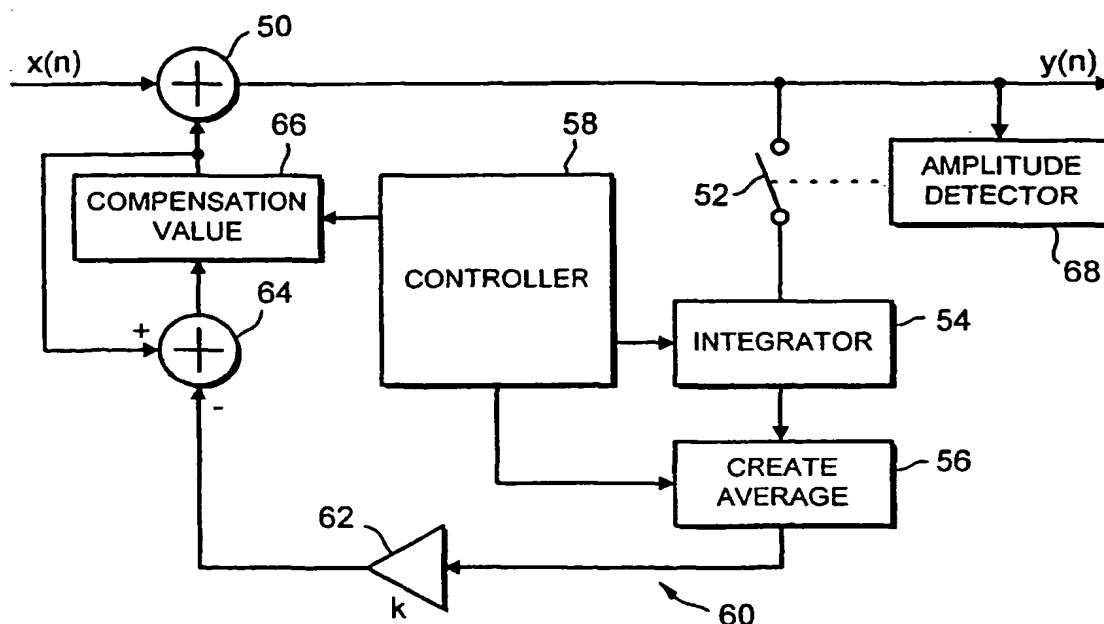

(57) Abstract

A radio receiver provides means for compensating for a DC-offset. The average value of digital samples of the signal at baseband is taken as the offset. The average is calculated from samples which have amplitudes below a threshold value to allow a more reliable estimate of the average value from a smaller number of samples.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

RADIO RECEIVERFIELD OF THE INVENTION

5 This invention relates to a radio receiver, and in particular to a radio receiver which demodulates a received signal into in-phase and quadrature baseband components.

BACKGROUND OF THE INVENTION

10 Radio receivers are known which detect in-phase and quadrature (I and Q) components of a received signal at baseband, that is, at or close to zero frequency.

15 Such receivers provide good performance, and have the further advantage that they can be made relatively cheaply. This makes them suitable for use in hand-held devices such as cellular telephones.

However, a problem with such receivers is that the detected signals include a DC-offset component, which can cause problems in processing the detected signals.

20 One way of overcoming this problem is to assume that, without the DC-offset, the received signals would have zero mean. The mean value of the actual signals can then be calculated using an appropriate averaging algorithm, and any difference from zero can be assumed to be the result of the DC-offset. This can then be
25 subtracted from the received signals to compensate for the DC-offset. US Patent No. 5,422,889 describes a receiver operating on this general principle.

30 In US Patent No. 5,241,702, it is proposed to differentiate the received signals to filter out any DC offset and then, after amplification, to integrate the signals. This integration essentially reverses the earlier differentiation, but sets the DC value to an arbitrary level. The DC-offset level is then estimated, and subtracted from the restored signal.

The solution proposed in US Patent No. 5,422,889 has the disadvantages that it needs to be locked to the TDMA structure, and needs to store information relating to each user.

5 A further difficulty with the solution proposed in US Patent No. 5,422,889 is the design of an appropriate algorithm to calculate the average value of the signal. If the average is calculated on the basis of a small number of samples then, statistically, it will be
10 relatively unreliable. On the other hand, if the average is calculated on the basis of a large number of samples then the algorithm will be relatively slow, and the compensator will react only slowly to real changes in the size of the DC-offset.

15 SUMMARY OF THE INVENTION

The present invention proceeds from the realization that the number of samples required, in order to obtain an acceptably reliable estimate of the average value of the signal, is a function of the
20 signal amplitude. Specifically, when calculating the average value of a signal, the actual signal component acts as a noise signal superimposed on the average level. Thus, since these actual signal levels are of course higher in the case of larger signals, larger
25 signals require a larger number of samples to be taken in order to obtain an acceptable estimate of the average value of the signal.

In a TDMA system, a receiver typically receives signals from different sources during different time
30 slots. These signals typically have different amplitudes.

The present invention therefore provides a receiver which detects when small signals are being received, and calculates the average value of the

signal only during those time periods. In some cases, it is advantageous to use measurements made on noise signals in empty timeslots or between timeslots.

As examples, the receiver may convert received signals to a first intermediate frequency, and subsequently downconverts to baseband I- and Q-components, or it may be a direct conversion receiver. In the former case, the DC-offset value will usually change only slowly, but, in the latter case, the DC-offset value may change more quickly, from one burst to another.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a block schematic diagram of a receiver in accordance with the invention.

Figure 2 is a block schematic diagram illustrating the operation of the receiver of Figure 1.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Figure 1 shows a radio receiver, which is of a type which is generally known. For example, a receiver of this type may be found in a hand-held portable communications device such as a mobile phone, or in a base station of a mobile communications system.

The receiver includes an antenna 2 for receiving RF signals, an amplifier 4 for amplifying the received signals, and a band-pass filter 6 for removing signals at frequencies remote from the expected signal frequency. Filtered signals are downconverted to a first intermediate frequency in a first mixer 8, which receives a first local oscillator signal from an oscillator 10. The signals at the first intermediate frequency are further amplified in an amplifier 12, and filtered in a band-pass filter 14.

A second local oscillator 16 supplies a second local oscillator signal, at a frequency equal to the

first intermediate frequency, to a second mixer 18. It further supplies the second local oscillator signal to a 90° phase shifter 20, and then to a third mixer 22. As is well known, the second mixer 18 then acts to

5 output an I-channel or in-phase component of the signal, at a carrier frequency of zero, that is, at baseband. Similarly, the third mixer acts to output a Q-channel or quadrature component of the signal, again at a carrier frequency of zero, that is, at baseband.

10 The in-phase component is amplified in an amplifier 23, filtered in a low-pass filter 24 to remove any spurious signals, and passed to an analog-digital converter 26 to form digital samples thereof. Similarly, the quadrature component is amplified in an

15 amplifier 30, filtered in a low-pass filter 32 to remove any spurious signals, and passed to an analog-digital converter 34 to form digital samples thereof.

The digital samples from the analog-digital converters 26, 34 are supplied to a digital signal

20 processor 36 for further processing.

Thus, the receiver of Figure 1 downconverts the received signal to baseband in two stages, with a first mixer 8 downconverting to a first intermediate frequency and a pair of second mixers 18, 22

25 downconverting to a second intermediate frequency at baseband. However, the invention is equally applicable to a direct conversion receiver, in which a received signal is downconverted to an intermediate frequency at baseband in a single mixer stage.

30 A disadvantage of the type of circuit shown in Figure 1 is that the mixers 18, 22, the amplifiers 23, 30, and the analog-digital converters 26, 34 at baseband add a DC-offset component to the received signals. A DC-value could also occur as a result of

mixing in the mixer or amplifiers of interferers or harmonics, for example if the intercept point is too low or the interfering signals too large. Obviously, any such offset component must be removed to ensure accurate demodulation of the received signals.

Figure 2 shows in a schematic form the processing of the digital samples from one of the channels, which is preferably carried out in the DSP 36 to remove the DC-offset components. It will be apparent to the person skilled in the art that the necessary processing can be carried out either in hardware or in software. For example, logical gates or (less conveniently) analog hardware can be used, or the algorithm can be implemented in software for a microprocessor or DSP.

In each channel, a signal $x(n)$ is made up of a large number of digital samples. The signal is supplied to an adder 50, where a compensation value is added to remove the DC-offset described earlier. The compensated signal $y(n)$ is output for further processing. The compensation can be carried out in real time, or can be used to process a block of sampled data signals.

The calculation of the compensation will now be described in more detail.

When the gate 52 is closed the output signal $y(n)$ is supplied to an integrator 54 which forms the sum of the received samples. The average of the summed samples is formed in a block 56, using an algorithm controlled by a controller 58. For example, the controller 58 controls the number of samples used in calculating the average. Thus, the block 56 sums the samples, and counts the number of samples, and forms an average value by dividing the number of samples into the sum of the samples when the count reaches a

predetermined number. The controller 58 then resets the integrator 54, and resets the counted number of samples, when the count has reached the predetermined number.

5 The average value generated by the block 56 thus represents the error in the existing compensation value. This is then used in a feedback loop 60, which includes an attenuator 62. The attenuator can be regarded as an amplifier, which has a gain constant k ,
10 which must have a value less than 1 to ensure that the feedback loop is stable. The output from the attenuator 62 is supplied to one input of an adder 64. The second input of the adder 64 receives the existing compensation value, so that the adder 64 supplies as
15 its output a new compensation value, which is the difference between the existing compensation value and the attenuated error value, and which is stored in a block 66 under the control of the controller 58. This new compensation value is also supplied to the second
20 input of the adder 50, where it is used to compensate for the DC-offset value in the input signal $x(n)$, as described earlier.

 As discussed above, the calculation can settle more quickly to a stable value (for a given value of
25 the gain constant k), if the signal level is low. The circuit of the present invention therefore includes an amplitude detector 68, which controls the gate 52 such that, in general terms, only samples which are below a threshold value are allowed to pass to the integrator
30 54.

 Preferably, the amplitude detector 68 compares the amplitude of each sample with a first threshold value, and controls the gate 52 to select samples for averaging only when a predefined number of successive

samples have amplitudes below the first threshold value. The first threshold value is preferably set at a lower level than that at which the noise, on average, is too large to allow reliable calculation of an average value within a reasonable number of samples. 5 Thereafter, the amplitude detector 68 compares the amplitude of each sample with a second threshold value, which is preferably 10-20dB above the first threshold, and controls the gate 52 to stop selecting samples for averaging as soon as one sample has an amplitude above the second threshold value. 10

The offset calculation described above is carried out on one series of samples, that is, samples of in-phase (I) or quadrature (Q) components, and determines the offset in that series of components. Preferably, 15 the receiver will calculate the DC-offset components of the I- and Q- components separately.

However, the amplitude detector 68, which determines whether a sample is to be selected for averaging, may be common to these two offset calculations. Thus, the amplitude detector may do more than look at the amplitude of each individual I- or Q- component sample. It may look at a measure of the signal amplitude, formed for example from the sum of 25 the amplitudes of corresponding I- and Q- samples, or from the square root of the sum of the squares of the amplitudes of corresponding I- and Q- samples. Based on the comparison of this measure of the signal amplitude with the thresholds described above, a determination may be made as to whether to select both 30 the I- and Q- components for averaging.

The compensation value which is applied is therefore obtained more reliably, by calculating the assumed DC-offset from an average value derived from

relatively weak signals. In the unlikely event that a receiver is receiving only strong signals in all TDMA timeslots, an existing compensation value will not be updated. However, this will have little effect on the receiver performance, because the presence of the DC-offset has little damaging effect on such strong signals.

The receiver of the present invention therefore allows accurate compensation for introduced DC-offset values.

CLAIMS

1. A radio receiver, comprising:
means for receiving a radio frequency signal;
means for converting the received signal to
5 baseband;
means for detecting I- and Q-components of the
downconverted received signal and forming digital
samples thereof;
means for calculating average values of the
10 detected I- and Q-components;
means for subtracting the calculated average
values of the detected I- and Q-components from the
detected I- and Q-components;
characterised by:
15 means for detecting an amplitude of the samples;
and
means for selecting samples for calculation of the
average value thereof only when the detected amplitude
is below a predetermined threshold.
- 20 2. A radio receiver as claimed in claim 1, wherein
the selecting means selects samples for averaging only
when a predefined number of successive samples have
amplitudes below a first threshold value.
- 25 3. A radio receiver as claimed in claim 2, wherein,
while the selecting means is selecting samples for
averaging, the selecting means stops selecting samples
for averaging as soon as one sample has an amplitude
above a second threshold value which is higher than the
first threshold value.
- 30 4. A radio receiver as claimed in claim 1, wherein
the means for calculating average values comprises
means for calculating a sum of said values, and means
for counting the number of such values, and means for
dividing the sum of the values by the number of values.

5. A radio receiver as claimed in claim 1, comprising first means for calculating average values of the detected I-components, and second means for calculating average values of the detected Q-components, and common means for detecting an amplitude from a pair of corresponding I- and Q-samples, such that samples are selected for calculation of the average value thereof only when the commonly detected amplitude is below a predetermined threshold.

6. A radio receiver as claimed in claim 1, comprising:

first means for calculating average values of the detected I-components, first means for detecting an amplitude of the I-component samples and first means for selecting I-component samples for calculation of the average value thereof only when the detected amplitude thereof is below a predetermined threshold; and

second means for calculating average values of the detected Q-components, second means for detecting an amplitude of the Q-component samples and second means for selecting Q-component samples for calculation of the average value thereof only when the detected amplitude thereof is below a predetermined threshold

7. A method of calculating a DC-offset value of a component of a received radio signal, the method comprising:

converting the received signal to baseband;
detecting the component of the downconverted received signal and forming digital samples thereof;
detecting an amplitude of the samples;
selecting samples only when the detected amplitude is below a predetermined threshold; and
calculating the DC-offset value as an average

value of the selected samples of the component.

8. A method of compensating a received radio signal, comprising calculating a DC-offset value of the received radio signal, by:

- 5 converting the received signal to baseband;
- detecting I- or Q-components of the downconverted received signal and forming digital samples thereof;
- detecting an amplitude of the samples;
- selecting samples only when the detected amplitude
- 10 is below a predetermined threshold; and
- calculating the DC-offset value as an average value of the selected samples of the I- and Q-components; and
- subtracting the calculated DC-offset values from
- 15 the detected I- and Q-components.

9. A method as claimed in claim 7, comprising selecting samples for averaging only when a predefined number of successive samples have amplitudes below a first threshold value.

- 20 10. A method as claimed in claim 9, comprising stopping selecting samples for averaging as soon as one sample has an amplitude above a second threshold value which is higher than the first threshold value.

- 25 11. A method as claimed in claim 8, comprising calculating the average values by calculating a sum of said values, and counting the number of such values, and dividing the sum of the values by the number of values.

- 30 12. A radio receiver, comprising:
 - a receiver circuit for converting a received signal to baseband;
 - a sampler for forming digital samples of at least one component of the received signal at baseband;
 - an averaging circuit for calculating average

values of selected samples of the detected component;
and

an amplitude detector, for comparing the amplitude
of the samples of the component with a threshold value;
5 wherein

samples are selected for calculation of the
average value thereof only when the detected amplitude
is below the threshold value.

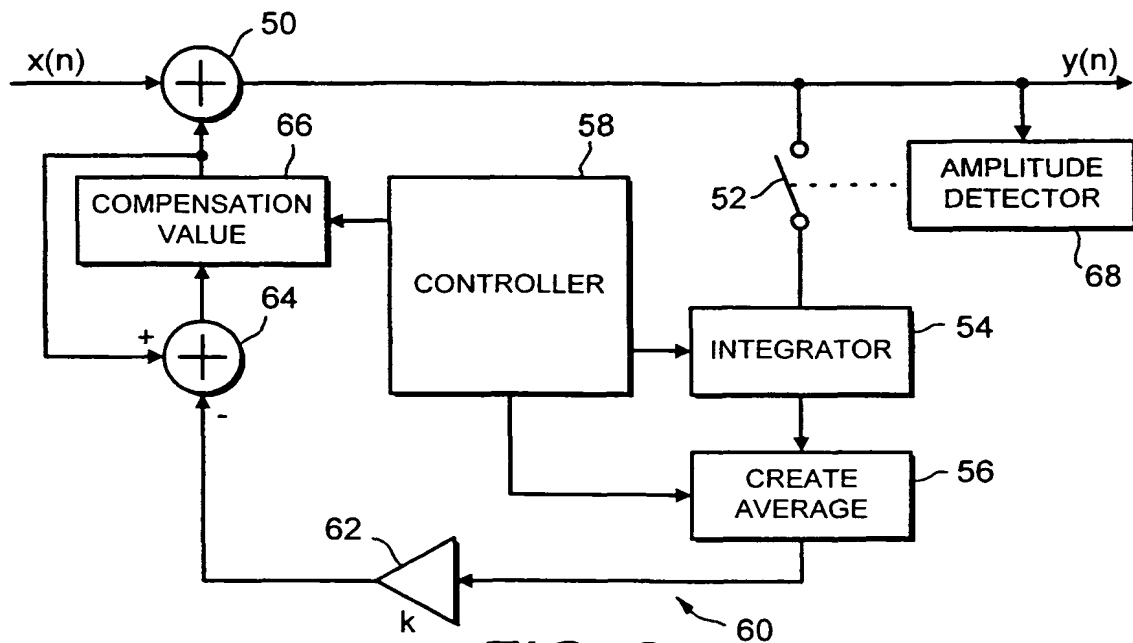
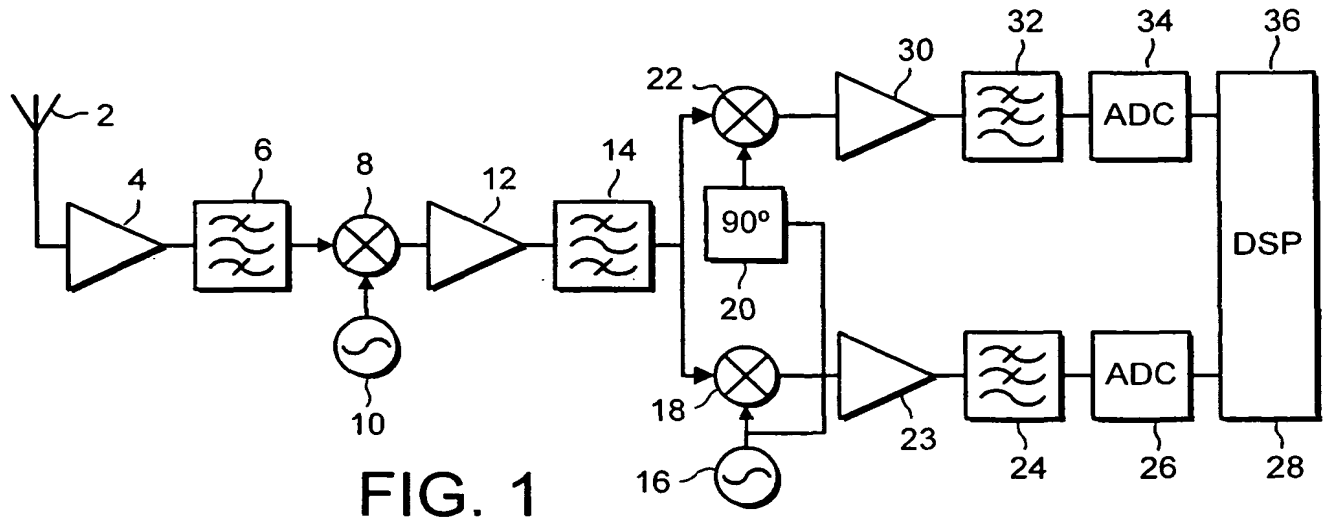


FIG. 2

INTERNATIONAL SEARCH REPORT

Int'l Application No

PCT/EP 00/03211

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04L25/06 H03D3/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L H03D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 552 494 A (SEL ALCATEL AG) 28 July 1993 (1993-07-28) the whole document	1-12
A	WO 98 10523 A (PHILIPS ELECTRONICS NV ;PHILIPS NORDEN AB (SE)) 12 March 1998 (1998-03-12)	
A	EP 0 863 606 A (NIPPON ELECTRIC CO) 9 September 1998 (1998-09-09)	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

10 August 2000

Date of mailing of the international search report

21/08/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Peeters, M

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. l. Application No

PCT/EP 00/03211

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0552494 A	28-07-1993	DE 4201194 A AT 150919 T CA 2087231 A DE 59208272 D ES 2103337 T FI 930167 A US 5663988 A	22-07-1993 15-04-1997 19-07-1993 30-04-1997 16-09-1997 19-07-1993 02-09-1997
WO 9810523 A	12-03-1998	CN 1200209 A EP 0865686 A JP 2000500317 T US 6009126 A	25-11-1998 23-09-1998 11-01-2000 28-12-1999
EP 0863606 A	09-09-1998	AU 5645898 A CN 1202767 A JP 10308684 A	10-09-1998 23-12-1998 17-11-1998

Form PCT/ISA/210 (patent family annex) (July 1992)